

TDI

TECHNICAL DATA

Model 4500

12 through 25 Line Interface Enclosure

Description

The TDI Model 4500 series Communications Interface is a multi line NID unit that utilizes all industry standard station protectors and a number of different subscriber bridges. Easy to both install and to field upgrade by adding additional subscriber bridges and protectors.

Features

- Order with from 1-25 protected lines installed.
- 3 pre-punched grommet/conduit holes
- Unit can be locked with a standard padlock.
- Provisions for telco over-ride using standard telco security driver.
- Protective covers over the protection fields.
- Weather resistant powder coated steel enclosure.

Dimensions


12 PAIR

4500-12-XBX: 17.5" x 13.5" x 3"


25 PAIR

4500-25-XCX: 17.5" x 17.0" x 3"

Call for details regarding protector options and pricing.

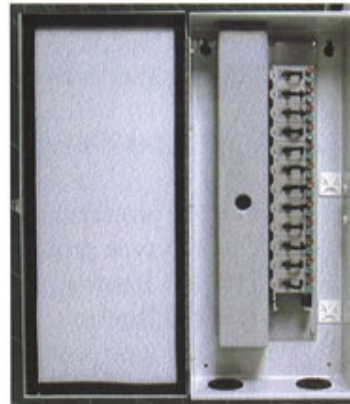

4500-12

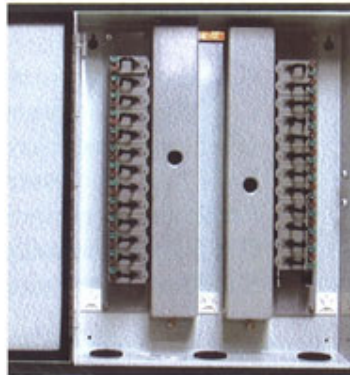

4500-25

TDI LLC
11100 Airport Drive, Suite 8
Hayden, ID 83835
208-660-5135 208-772-6196 fax

Specifications subject to change without notice

twilkin@gte.net
www.ospproducts.com

4500- XX – XXX

1 2 3 4

1: NUMBER OF INCOMING LINES

06 = 6 pair

12 = 12 pair

25 = 25 pair

50 = 50 pair

Any number between 1-50 pair may be entered here.

2: PROTECTOR TYPE

O = No protection installed

C = 125 type protector

D = 455 Bourns

E = 155 Bourns

S = 356 type protector

T = 355 type protector

3: ENCLOSURE SIZE

B = 12 pair enclosure 17" x 7.75" x 3"

C = 25 pair enclosure 17" x 15" x 3"

D = 50 pair enclosure 34" x 15" x 3"

E = 12 pair enclosure 17" x 7.75" x 3" Stainless Steel

F = 25 pair enclosure 17" x 15" x 3" Stainless Steel

G = 50 pair enclosure 34" x 15" x 3" Stainless Steel

S = 25 pair enclosure 20" x 20" x 4"

4: SPECIAL OPTIONS

O = No special options

D = Gel in subscriber bridge